
Thermocoil (Pty) Ltd

Heat Exchangers

Condenser Catalogue

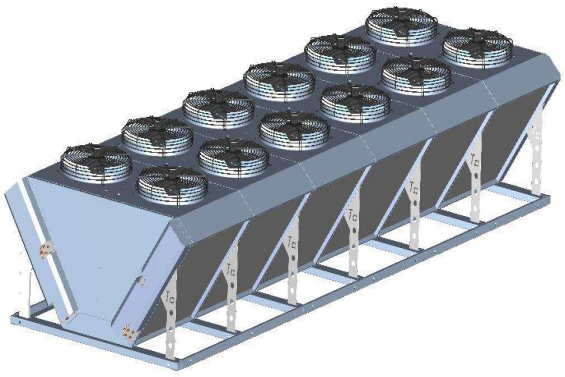

Version 25.2: October 2025

Thermocoil

Thermocoil (Pty) Ltd is a Cape Town, South Africa based refrigeration and air-conditioning heat exchanger manufacturer. The technology behind Thermocoil is German, having close ties with Thermofin of Germany. This technology agreement has led to Thermocoil manufacturing the most efficient copper-aluminum heat exchangers using the most advanced manufacturing equipment, materials and processes.

Our standard ranges for Freon refrigeration include:

Evaporators: TEB, TEMB, TEDB, TDD and gravity coils (BC & DC)
Condensers: TCHM, TCVM, TCV & TCD
Condensing units: TCPH, TCPV, TCCP & TCHS

R744 Thermocoil offers an extended equipment range for high pressure R744 (CO_2) applications.
Evaporators: TRB & TRMB & Gas Coolers: TOD & TOV
For SS tube coils Thermocoil has a registered welding procedure in place with registered welders to apply these specific processes.

Customized Air coolers & Dry coolers with the standard product format or a special format to suit customer and site-specific needs.

Thermocoil also manufactures heat exchangers to OEM specifications, replacement heat exchangers and designs and produces heat exchangers for customized installations for both Freon and Chilled Water/Glycol installations.



CONDENSERS

				PAGE
Condenser Design and Capacity Info				**4 & 5**
Quick Find List (Sorted by Capacity)				**6**
	1 kW	**to**	**17.5 kW**	6
	17.6 kW	**to**	**100 kW**	7
	101 kW	**to**	**862 kW**	8
Weather proof condensing units	**5.3 kW**	**to**	**60.6 kW**	9
TCHM (Base Mounted Condensers)				**10**
	TCHM 035-040			10
	TCHM 045-050			11
TCVM (Leg Mounted Condensers)				**12**
	TCVM 035-040			12
	TCVM 045-050			13
TCV/H (Deck Condensers)				**14**
	TCVB/TCHB 050			14
	TCV/H 063.2			15
	TCV/H 080.2			16
TCD (Vee Condensers)				**17**
	TCD 050 (2 Fan Rows)			17
	TCD 063 (1 Fan Row)			18
	TCD 063 (2 Fan Rows)			19
	TCD 080 (2 Fan Rows)			20
TCPH (Floor Mounted Pack Condensers)				**21**
	TCPH 035-040			21
	TCPH 050			22
TCPV (Wall Mounted Pack Condensers)				**23**
	TCPV 035-040			23
TCCP (Cool Pack Condensers)				**24**
	TCCP 035-040-050			24
TCHS (Small Condensers)				**25**
	TCHS 025-031-035			25
Condenser Selection Example				**26**
Regional Data (Temperatures and Altitudes)				**27**

Thermocoil reserves the right to modify or update any information within this catalogue without prior notice

Design

Heat exchanger
Featuring tube spacing of 25 x 21.65 mm or 40 x 34.6 mm in a staggered layout with inner grooved copper tube. Fins are made of pure aluminium. The heat exchangers are soldered under inert gas and are thus non-oxidizing.

Fin spacing
Ø3/8": 2.1mm to 2.2mm standard for fan diameters 250 to 630, and Ø12mm: 2.4mm for sizes 800

Casing
Hot – galvanized steel sheet with powder coating RAL 5009 (Azure Blue)

Fans
Low noise level axial fans with maintenance-free motors, protection class IP54, ISO F.
Sizes 250/350/400/450/500/630/800

Either single phase 220V 50Hz, or three-phase 380V 50Hz motors with 2 speeds (Y - Δ changeover) and speed control.

Ambient motor temperature -30°C to +55°C.

Standard winding protection by thermo contacts.

Axial fans
The Thermocoil TCHM series and above condensers are equipped with speed-variable external rotor motors. Depending on the demand, either phase-shaving, transformer or frequency controllers may be delivered. As a more economical option step control of fans is also available.

Power consumption can be reduced considerably by the use of electrically commutated fans. The fans are infinitely variable and work at minimum power consumption within the complete speed range.

Thermocoil also offers state-of-the-art EC technology as a complete solution with pressure or temperature controlled control units.

Capacity Data

The capacities Q_N shown in the catalogue refer to the refrigerant R404A, at a temperature difference ΔT_1=15K between the inlet air temperature (30°C) and the condensation temperature (45°C) and installation at geodetic height NN (sea level) with copper tubes and aluminium fins.

For the use of other refrigerants with different temperature differences, different installation levels and different fin materials the Nominal capacity Q_N can be calculated according to the formula:

$$\dot{Q}_N = \frac{\dot{Q}_C}{F_1 \times F_2 \times F_3 \times F_4}$$

Q_N = Condenser Nominal / Catalogue Capacity
Q_C = Condenser Capacity

F_1 = Correction Factor for Temperature Difference ΔT_1 between 7K and 20K

$$F_1 = \frac{\Delta T_1}{15}$$

F_2 = Correction factor for Refrigerant

Refrigerant	R22	R134a	R404A	R407A	R407C	R507
F2	0.96	0.93	1.00	0.83	0.87	1.00

F_3 = Correction factor for geodetic height

Metres above Sea Level	0	500	1000	1500	2000	2500
F3	1	0.97	0.94	0.91	0.88	0.85

F_4 = Correction factor for fin material

F4 : Material	
1.00	Aluminium
0.97	Coated Aluminium
1.03	Copper

The technical data is acquired by theoretical means and is subject to the usual tolerance. Subject to change without prior notice.

Condenser Selection Example

Total Heat Rejection (Using R404A)	19,500 Watts
Condensing Temperature	+45°C
Location	Pretoria
Standard Aluminium Fins	
Altitude in Pretoria	1371m
Ambient Temperature in Pretoria	+34°C

Correction Factor 1

Correction factor for Temperature Difference: $F_1 = \frac{\Delta T_1}{15} = \frac{11}{15} = 0.7333$

Correction Factor 2

Correction factor for Refrigerant: $F_2 = 1.00$

Refrigerant	R22	R134a	R404A	R407A	R407C	R507
F2	0.96	0.93	1.00	0.83	0.87	1.00

Correction Factor 3

Correction factor for Geodetic Height (Altitude): $F_3 = 0.92$

Metres above Sea Level	0	500	1000	1500	2000	2500
F3	1	0.97	0.94	0.91	0.88	0.85

Correction Factor 4

Correction factor for Fin Material: $F_4 = 1.00$

F4 : Material	
1.00	Aluminium
0.97	Coated Aluminium
1.03	Copper

Capacity Required

$$\frac{Total\ Heat\ Rejection}{F_1 x F_2 x F_3 x F_4}$$

$$= \frac{19{,}500}{0.7333 \times 1.0 \times 0.92 \times 1.00}$$

= 28,900 Watts

From the catalogue, depending on what air flow configuration is required, the selected condenser, with a rated capacity of 29.1kW, would be a

QUICK FIND LIST SORTED BY CAPACITY

1 kW to 17.5 kW

Type	Code	kW	Style	Air Discharge	Length (A) mm	Depth (B) mm	Height (C) mm	Page
TCHS	025.A-1100	1.1	Small Condenser	Horizontal	340	481	305	22
TCHS	025.B-1500	1.5	Small Condenser	Horizontal	340	481	305	22
TCHS	025.C-1900	1.9	Small Condenser	Horizontal	340	481	305	22
TCHS	025.C-2100	2.1	Small Condenser	Horizontal	400	481	305	22
TCHS	025.B-3200	3.2	Small Condenser	Horizontal	620	481	305	22
TCHS	031.A-3200	3.2	Small Condenser	Horizontal	500	580	375	22
TCHS	031.B-4000	4.0	Small Condenser	Horizontal	500	580	375	22
TCHM	035.1-11-A-N	4.9	Base Mount	Horizontal	646	750	562	8
TCVM	035.1-11-A-N	4.9	Leg Mount	Vertical	648	582	736	10
TCHS	031.C-5000	5.0	Small Condenser	Horizontal	500	580	375	22
TCPV	035.1-11-A-N	5.3	Wall Mount Pack	Vertical	750	507	936	20
TCCP	035.1-11-A-N	5.3	Cool Pack	Horizontal	475	420	722	21
TCHS	031.E-6000	6.0	Small Condenser	Horizontal	500	580	375	22
TCHS	035.C-N	6.4	Small Condenser	Horizontal	550	155	410	22
TCHM	035.1-11-B-N	6.7	Base Mount	Horizontal	646	750	562	8
TCVM	035.1-11-B-N	6.7	Leg Mount	Vertical	648	582	736	10
TCPV	035.1-11-B-N	6.9	Wall Mount Pack	Vertical	750	507	936	20
TCHS	031.A-7000	7.0	Small Condenser	Horizontal	1000	600	375	22
TCCP	035.1-11-B-N	7.3	Cool Pack	Horizontal	475	420	722	21
TCHM	035.1-11-C-N	7.6	Base Mount	Horizontal	646	750	562	8
TCVM	035.1-11-C-N	7.6	Leg Mount	Vertical	648	582	736	10
TCPV	035.1-11-C-N	8.3	Wall Mount Pack	Vertical	750	507	936	20
TCPH	035.1-11-B-N	8.6	Floor Mount Pack	Horizontal	767	904	940	18
TCCP	035.1-11-C-N	8.7	Cool Pack	Horizontal	475	420	722	21
TCHM	040.1-11-B-N	9.0	Base Mount	Horizontal	746	900	605	8
TCVM	040.1-11-B-N	9.0	Leg Mount	Vertical	746	625	794	10
TCPV	040.1-11-B-N	9.5	Wall Mount Pack	Vertical	750	507	936	20
TCPH	035.1-11-C-N	9.8	Floor Mount Pack	Horizontal	767	904	940	18
TCHM	035.1-12-A-N	10.2	Base Mount	Horizontal	1146	750	562	8
TCVM	035.1-12-A-N	10.2	Leg Mount	Vertical	1146	582	736	10
TCHM	040.1-11-C-N	10.3	Base Mount	Horizontal	746	900	605	8
TCVM	040.1-11-C-N	10.3	Leg Mount	Vertical	746	625	794	10
TCPH	040.1-11-B-N	10.6	Floor Mount Pack	Horizontal	767	904	940	18
TCPV	040.1-11-C-N	11.0	Wall Mount Pack	Vertical	750	507	936	20
TCHM	040.1-11-E-N	11.7	Base Mount	Horizontal	746	900	605	8
TCVM	040.1-11-E-N	11.7	Leg Mount	Vertical	746	625	794	10
TCPH	040.1-11-C-N	12.2	Floor Mount Pack	Horizontal	767	904	940	18
TCPV	040.1-11-E-N	13.3	Wall Mount Pack	Vertical	750	507	936	20
TCHM	035.1-12-B-N	13.7	Base Mount	Horizontal	1146	750	562	8
TCVM	035.1-12-B-N	13.7	Leg Mount	Vertical	1146	582	736	10
TCCP	040.1-11-B-N	13.9	Cool Pack	Horizontal	475	420	893	21
TCPH	050.1-11-B-N	14.0	Floor Mount Pack	Horizontal	767	904	940	19
TCCP	050.1-11-A-N	14.2	Cool Pack	Horizontal	475	420	893	21
TCHM	045.1-11-B-N	15.1	Base Mount	Horizontal	916	950	705	9
TCVM	045.1-11-B-N	15.1	Leg Mount	Vertical	916	950	705	11
TCPV	035.1-12-B-N	15.2	Wall Mount Pack	Vertical	1352	507	936	20
TCHM	035.1-12-C-N	15.9	Base Mount	Horizontal	1146	750	562	8
TCVM	035.1-12-C-N	15.9	Leg Mount	Vertical	1146	582	736	10
TCPH	050.1-11-C-N	16.5	Floor Mount Pack	Horizontal	767	904	940	19
TCHM	045.1-11-C-N	17.5	Base Mount	Horizontal	916	950	705	9
TCVM		17.5	Leg Mount	Vertical	916	950	705	11

Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.

Continued...

QUICK FIND LIST SORTED BY CAPACITY

17.6 kW to 100 kW

Type	Code	kW	Style	Air Discharge	Length (A) mm	Depth (B) mm	Height (C) mm	Page
TCPV	035.1-12-C-N	17.6	Wall Mount Pack	Vertical	1352	507	936	20
TCHM	040.1-12-B-N	17.9	Base Mount	Horizontal	1346	900	605	8
TCVM	040.1-12-B-N	17.9	Leg Mount	Vertical	1348	625	794	10
TCCP	050.1-11-B-N	19.8	Cool Pack	Horizontal	475	420	893	21
TCHM	050.1-11-B-N	20.2	Base Mount	Horizontal	1044	1050	912	9
TCVM	050.1-11-B-N	20.2	Leg Mount	Vertical	1044	1050	912	11
TCPH	050.1-11-E-N	20.6	Floor Mount Pack	Horizontal	767	904	940	19
TCHM	040.1-12-C-N	20.7	Base Mount	Horizontal	1346	900	605	8
TCVM	040.1-12-C-N	20.7	Leg Mount	Vertical	1348	625	794	10
TCHM	045.1-11-E-N	21.5	Base Mount	Horizontal	916	950	705	9
TCVM	045.1-11-E-N	21.5	Leg Mount	Vertical	916	950	705	11
TCPH	040.1-12-B-N	22.8	Floor Mount Pack	Horizontal	1538	904	940	18
TCCP	050.1-11-C-N	22.9	Cool Pack	Horizontal	475	420	893	21
TCPV	035.1-13-B-N	23.3	Wall Mount Pack	Vertical	2033	507	936	20
TCHM	040.1-12-E-N	23.4	Base Mount	Horizontal	1346	900	605	8
TCVM	040.1-12-E-N	23.4	Leg Mount	Vertical	1348	625	794	10
TCHM	050.1-11-C-N	23.7	Base Mount	Horizontal	1044	1050	912	9
TCVM	050.1-11-C-N	23.7	Leg Mount	Vertical	1044	1050	912	11
TCPH	040.1-12-C-N	26.4	Floor Mount Pack	Horizontal	1538	904	940	18
TCPV	035.1-13-C-N	27.1	Wall Mount Pack	Vertical	2033	507	936	20
TCHM	050.1-11-E-N	29.1	Base Mount	Horizontal	1044	1050	912	9
TCVM	050.1-11-E-N	29.1	Leg Mount	Vertical	1044	1050	912	11
TCPH	050.1-12-B-N	30.9	Floor Mount Pack	Horizontal	1538	904	940	19
TCHM	045.1-12-B-N	31.2	Base Mount	Horizontal	1616	950	705	9
TCVM	045.1-12-B-N	31.2	Leg Mount	Vertical	1616	950	705	11
TCPH	050.1-12-C-N	35.8	Floor Mount Pack	Horizontal	1538	904	940	19
TCHM	045.1-12-C-N	36.7	Base Mount	Horizontal	1616	950	705	9
TCVM	045.1-12-C-N	36.7	Leg Mount	Vertical	1616	950	705	11
TCPH	050.1-12-E-N	40.4	Floor Mount Pack	Horizontal	1538	904	940	19
TCHM	050.1-12-B-N	41.6	Base Mount	Horizontal	1844	1050	912	9
TCVM	050.1-12-B-N	41.6	Leg Mount	Vertical	1844	1050	912	11
TCHM	045.1-12-E-N	43.0	Base Mount	Horizontal	1616	950	705	9
TCVM	045.1-12-E-N	43.0	Leg Mount	Vertical	1616	950	705	11
TCHM	050.1-12-C-N	47.3	Base Mount	Horizontal	1844	1050	912	9
TCVM	050.1-12-C-N	47.3	Leg Mount	Vertical	1844	1050	912	11
TCPH	050.1-13-C-N	53.7	Floor Mount Pack	Horizontal	2300	904	940	19
TCHM	050.1-12-E-N	58.2	Base Mount	Horizontal	1844	1050	912	9
TCVM	050.1-12-E-N	58.2	Leg Mount	Vertical	1844	1050	912	11
TCPH	050.1-13-E-N	60.6	Floor Mount Pack	Horizontal	2300	904	940	19
TCHM	050.1-13-B-N	62.9	Base Mount	Horizontal	2644	1050	938	9
TCVM	050.1-13-B-N	62.9	Leg Mount	Vertical	2644	1050	938	11
TCHM	050.1-13-C-N	73.8	Base Mount	Horizontal	2644	1050	938	9
TCVM	050.1-13-C-N	73.8	Leg Mount	Vertical	2644	1050	938	11
TCHM	050.1-13-E-N	87.4	Base Mount	Horizontal	2644	1050	938	9
TCVM	050.1-13-E-N	87.4	Leg Mount	Vertical	2644	1050	938	11
TCV	050.1-13-C-N	88.9	Deck Condenser	Vertical	4000	912	938	12
TCD	063.1-12-B-L	90.4	Vee	Vertical	1800	1060	1080	15
TCD	050.1-22-B-N	99.8	Vee	Vertical	1780	1625	945	14

Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.

Continued...

QUICK FIND LIST SORTED BY CAPACITY

101 kW to 862 kW

Type	Code	kW	Style	Air Discharge	Length (A) mm	Depth (B) mm	Height (C) mm	Page
TCV	063.1-12-B-N	101.6	Deck Condenser	Vertical	2500	1164	950	12
TCD	063.1-12-B-N	102.7	Vee	Vertical	1800	1060	1080	15
TCV	050.1-22-A-N	104.9	Deck Condenser	Vertical	2200	1712	938	12
TCD	063.1-12-C-L	105.7	Vee	Vertical	1800	1060	1080	15
TCD	050.1-22-C-N	116.1	Vee	Vertical	1780	1625	945	14
TCV	050.1-22-C-N	121.4	Deck Condenser	Vertical	2800	1712	938	12
TCD	063.1-12-C-N	127.9	Vee	Vertical	1800	1060	1080	15
TCD	063.1-13-B-L	138.6	Vee	Vertical	2600	1060	1080	15
TCV	063.1-13-B-N	148.1	Deck Condenser	Vertical	3540	1164	950	12
TCD	050.1-23-B-N	150.8	Vee	Vertical	2580	1625	945	14
TCD	080.1-21-B-N	151.1	Vee	Vertical	2200	2200	2115	17
TCD	063.1-13-C-L	157.4	Vee	Vertical	2600	1060	1080	15
TCV	050.1-23-A-N	161.2	Deck Condenser	Vertical	3150	1712	938	12
TCD	063.1-13-B-N	163.5	Vee	Vertical	2600	1060	1080	15
TCV	080.1-12-B-N	175.1	Deck Condenser	Vertical	4200	1170	1480	13
TCD	080.1-21-C-N	175.5	Vee	Vertical	2200	2200	2115	17
TCD	050.1-23-C-N	176.8	Vee	Vertical	2580	1625	945	14
TCD	063.1-14-B-L	180.5	Vee	Vertical	3400	1060	1080	15
TCD	063.1-13-C-N	187.3	Vee	Vertical	2600	1060	1080	15
TCV	080.1-12-E-N	196.2	Deck Condenser	Vertical	4200	1490	1480	13
TCD	050.1-24-B-N	201.9	Vee	Vertical	3380	1625	945	14
TCV	063.1-22-B-N	203.2	Deck Condenser	Vertical	2500	2213	950	12
TCD	063.1-14-B-N	205.2	Vee	Vertical	3400	1060	1080	15
TCD	063.1-14-C-L	210.2	Vee	Vertical	3400	1060	1080	15
TCD	050.1-24-C-N	240.3	Vee	Vertical	3380	1625	945	14
TCD	050.1-25-B-N	254.7	Vee	Vertical	4180	1625	945	14
TCV	080.1-13-B-N	256.0	Deck Condenser	Vertical	6100	1170	1480	13
TCD	063.1-14-C-N	257.7	Vee	Vertical	3400	1060	1080	15
TCD	063.1-22-B-N	266.0	Vee	Vertical	2200	2200	2115	16
TCV	080.1-13-E-N	291.6	Deck Condenser	Vertical	6100	1490	1480	13
TCV	063.1-23-B-N	296.3	Deck Condenser	Vertical	3600	2213	950	12
TCD	080.1-22-B-N	297.5	Vee	Vertical	3200	2200	2115	17
TCD	050.1-25-C-N	299.3	Vee	Vertical	4180	1625	945	14
TCD	063.1-22-C-N	308.1	Vee	Vertical	2200	2200	2115	16
TCV	080.1-22-B-N	350.1	Deck Condenser	Vertical	4200	2290	1480	13
TCD	050.1-26-C-N	353.5	Vee	Vertical	4980	1625	945	14
TCD	080.1-22-C-N	354.9	Vee	Vertical	3200	2200	2115	17
TCD	063.1-23-B-N	398.6	Vee	Vertical	3200	2200	2115	16
TCD	080.1-23-B-N	457.5	Vee	Vertical	4200	2200	2115	17
TCD	063.1-23-C-N	462.1	Vee	Vertical	3200	2200	2115	16
TCV	080.1-23-B-N	511.9	Deck Condenser	Vertical	6100	2290	1480	13
TCD	063.1-24-B-N	527.4	Vee	Vertical	4200	2200	2115	16
TCD	080.1-23-C-N	535.3	Vee	Vertical	4200	2200	2115	17
TCD	080.1-24-B-N	597.3	Vee	Vertical	5200	2200	2115	17
TCD	063.1-24-C-N	617.8	Vee	Vertical	4200	2200	2115	16
TCD	063.1-25-B-N	639.5	Vee	Vertical	5200	2200	2115	16
TCD	080.1-24-C-N	709.6	Vee	Vertical	5200	2200	2115	17
TCD	063.1-25-C-N	762.5	Vee	Vertical	5200	2200	2115	16
TCD	080.1-25-B-N	763.2	Vee	Vertical	5200	2200	2115	17
TCD	080.1-25-C-N	862.2	Vee	Vertical	5200	2200	2115	17

Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.

QUICK FIND LIST

5.3 kW to 60.6 kW

CONDENSING UNITS - SORTED BY CAPACITY


Type	Code	kW	Style	Air Discharge	Length (A) mm	Depth (B) mm	Height (C) mm	Page
TCCP	035.1-11-A-N	5.3	Weatherproof	Horisontal	655	475	420	23
TCPV	035.1-11-A-N	5.3	Weatherproof	Vertical	750	507	936	22
TCPV	035.1-11-B-N	6.9	Weatherproof	Vertical	750	507	936	22
TCCP	035.1-11-B-N	7.3	Weatherproof	Horisontal	655	475	420	23
TCPV	035.1-11-C-N	8.3	Weatherproof	Vertical	750	507	936	22
TCPH	035.1-11-B-N	8.6	Weatherproof	Horisontal	767	904	940	20
TCCP	035.1-11-C-N	8.7	Weatherproof	Horisontal	655	475	420	23
TCPV	040.1-11-B-N	9.6	Weatherproof	Vertical	835	557	936	22
TCPH	035.1-11-C-N	9.8	Weatherproof	Horisontal	767	904	940	20
TCPH	040.1-11-B-N	10.6	Weatherproof	Horisontal	767	904	940	20
TCPV	040.1-11-C-N	11.1	Weatherproof	Vertical	835	557	936	22
TCPH	040.1-11-C-N	12.2	Weatherproof	Horisontal	767	904	940	20
TCCP	040.1-11-B-N	13.9	Weatherproof	Horisontal	755	475	420	23
TCPH	050.1-11-B-N	14.0	Weatherproof	Horisontal	767	904	940	21
TCPV	040.1-11-E-N	14.1	Weatherproof	Vertical	835	557	936	22
TCCP	050.1-11-A-N	14.2	Weatherproof	Horisontal	755	475	420	23
TCPV	035.1-12-B-N	15.2	Weatherproof	Vertical	1352	507	936	22
TCPH	050.1-11-C-N	16.5	Weatherproof	Horisontal	767	904	940	21
TCPV	035.1-12-C-N	17.6	Weatherproof	Vertical	1352	507	936	22
TCCP	050.1-11-B-N	19.8	Weatherproof	Horisontal	755	475	420	23
TCPH	050.1-11-E-N	20.6	Weatherproof	Horisontal	767	904	940	21
TCPV	040.1-12-B-N	22.6	Weatherproof	Vertical	1437	557	936	22
TCPH	040.1-12-B-N	22.8	Weatherproof	Horisontal	1538	904	940	21
TCCP	050.1-11-C-N	22.9	Weatherproof	Horisontal	755	475	420	23
TCPV	035.1-13-B-N	23.3	Weatherproof	Vertical	2033	507	936	22
TCPV	040.1-12-C-N	26.0	Weatherproof	Vertical	1437	557	936	22
TCPH	040.1-12-C-N	26.4	Weatherproof	Horisontal	1538	904	940	21
TCPV	035.1-13-C-N	27.1	Weatherproof	Vertical	2033	507	936	22
TCPV	040.1-12-E-N	29.8	Weatherproof	Vertical	1437	557	936	22
TCPV	040.1-13-B-N	30.5	Weatherproof	Vertical	2118	557	936	22
TCPH	050.1-12-B-N	30.9	Weatherproof	Horisontal	1538	904	940	21
TCPH	050.1-12-C-N	35.8	Weatherproof	Horisontal	1538	904	940	21
TCPV	040.1-13-C-N	36.8	Weatherproof	Vertical	2118	557	936	22
TCPV	040.1-13-E-N	40.2	Weatherproof	Vertical	2118	557	936	22
TCPH	050.1-12-E-N	40.4	Weatherproof	Horisontal	1538	904	940	21
TCCP	050.1-21-C-N	45.8	Weatherproof	Horisontal	1300	420	1693	23
TCCP	050.1-21-E-N	54.3	Weatherproof	Horisontal	1300	420	1693	23
TCPH	050.1-13-C-N	53.7	Weatherproof	Horisontal	2300	904	940	21
TCPH	050.1-13-E-N	60.6	Weatherproof	Horisontal	2300	904	940	21

Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.

HORIZONTAL AIR DISCHARGE

TCHM 035
TCHM 040

	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Recom. Receiver Size	Dimensions				Nett Weight		
												Length (A)	Depth (B)	Height (C)	Base Height (D)	Condenser	Base	Receiver
DIA 350 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**mm**	**kg**	**kg**	**kg**
035.1-11-A-N	**4.9**	8.1	2498	3.1	1	220	0.58	1.34	5/8	5/8	6.5	646	750	562	100	19	14	3.7
035.1-11-B-N	**6.7**	12.2	2333	2.9	1	220	0.58	1.88	5/8	5/8	6.5	646	750	562	100	20	14	3.7
035.1-11-C-N	**7.6**	16.2	2190	2.7	1	220	0.58	2.60	5/8	5/8	6.5	646	750	562	100	22	14	3.7
035.1-12-A-N	**10.2**	16.2	4993	3.1	2	220	0.58	2.50	5/8	5/8	8	1146	750	562	100	28	26	4.2
035.1-12-B-N	**13.7**	24.3	4664	2.9	2	220	0.58	3.76	5/8	5/8	8	1146	750	562	100	34	26	4.2
035.1-12-C-N	**15.9**	32.4	4378	2.7	2	220	0.58	5.01	5/8	5/8	9	1146	750	562	100	36	26	5
DIA 400 FANS																		
040.1-11-B-N	**9.0**	16.2	3310	3.2	1	220	0.73	2.65	5/8	5/8	8	746	900	605	100	26	20	4.2
040.1-11-C-N	**10.3**	21.6	3090	3	1	220	0.73	3.54	5/8	5/8	9	746	900	605	100	28	20	5
040.1-11-E-N	**11.7**	32.4	2760	2.7	1	220	0.73	5.31	5/8	5/8	9	746	900	605	100	32	20	5
040.1-12-B-N	**17.9**	32.4	6625	3.2	2	220	0.73	5.14	5/8	5/8	12	1346	900	605	100	44	38	6
040.1-12-C-N	**20.7**	43.2	6180	3	2	220	0.73	6.86	5/8	5/8	12	1346	900	605	100	48	38	6
040.1-12-E-N	**23.4**	64.8	5530	2.7	2	220	0.73	10.29	7/8	3/4	12	1346	900	605	100	54	38	6

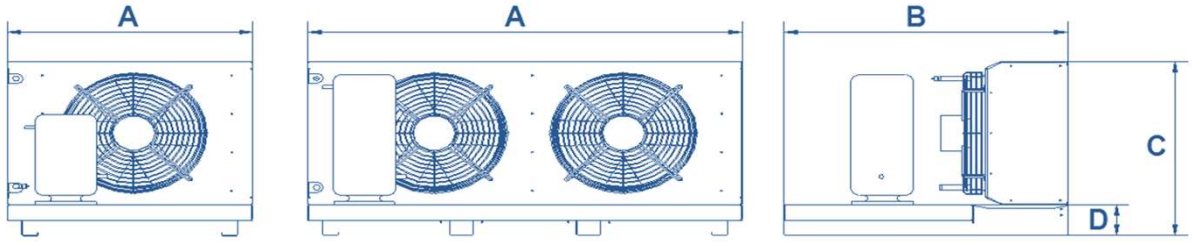

FAN Rating D350 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1400
Power Draw	**Watts**	130
Current Draw	**Amps**	0.58

FAN Rating D630 EC Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1450
Power Draw	**Watts**	3000
Current Draw	**Amps**	4.6

* Please NOTE: Liquid recievers are not fitted as standard.
It's an optional extra


Fin Spacing: 2.2mm


Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.

HORIZONTAL AIR DISCHARGE

TCHM 045
TCHM 050

	Nominal Capacity **R404A** 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Recom. Receiver Size	Dimensions				Nett Weight		
												Length (A)	Depth (B)	Height (C)	Base Height (D)	Condenser	Base	Receiver
DIA 450 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**mm**	**kg**	**kg**	**kg**
045.1-11-B-N	**15.1**	22.7	5875	3.9	1	380	0.98	3.60	5/8	5/8	9	916	950	705	100	39	24	5
045.1-11-C-N	**17.5**	30.2	5556	3.7	1	380	0.98	4.80	5/8	5/8	9	916	950	705	100	42	24	5
045.1-11-E-N	**21.5**	45.4	4949	3.3	1	380	0.98	7.00	5/8	5/8	12	916	950	705	100	47	24	6
045.1-12-B-N	**31.2**	45.4	11751	3.9	2	380	0.98	7.20	7/8	3/4	12	1616	950	705	100	70	38	6
045.1-12-C-N	**36.7**	60.5	11113	3.7	2	380	0.98	9.40	7/8	7/8	18	1616	950	705	100	75	38	9
045.1-12-E-N	**43.0**	90.7	9898	3.3	2	380	0.98	14.00	7/8	7/8	18	1616	950	705	100	85	38	9
DIA 500 FANS																		
050.1-11-B-N	**20.2**	34.6	7236	3.1	1	380	1.41	5.57	3/4	3/4	12	1044	1050	912	100	50	32	6
050.1-11-C-N	**23.7**	46.1	6912	3	1	380	1.41	7.43	3/4	3/4	12	1044	1050	912	100	55	32	6
050.1-11-E-N	**29.1**	69.1	6336	2.8	1	380	1.41	11.15	3/4	3/4	12	1044	1050	912	100	65	32	6
050.1-12-B-N	**41.6**	69.1	14436	3.1	2	380	1.41	10.89	1 1/8	7/8	18	1844	1050	912	100	86	45	9
050.1-12-C-N	**47.3**	92.2	13752	3	2	380	1.41	14.52	1 1/8	7/8	18	1844	1050	912	100	102	45	9
050.1-12-E-N	**58.2**	138.2	12672	2.8	2	380	1.41	21.78	1 1/8	7/8	18	1844	1050	912	100	125	45	9
050.1-13-B-N	**62.9**	103.7	21672	3.1	3	380	1.41	16.20	1 1/8	7/8	25	2644	1050	938	100	126	112	24
050.1-13-C-N	**73.8**	138.2	20628	3	3	380	1.41	21.60	1 1/8	7/8	30	2644	1050	938	100	140	112	25
050.1-13-E-N	**87.4**	207.4	19008	2.8	3	380	1.41	32.40	1 3/8	1 1/8	35	2644	1050	938	100	168	112	28

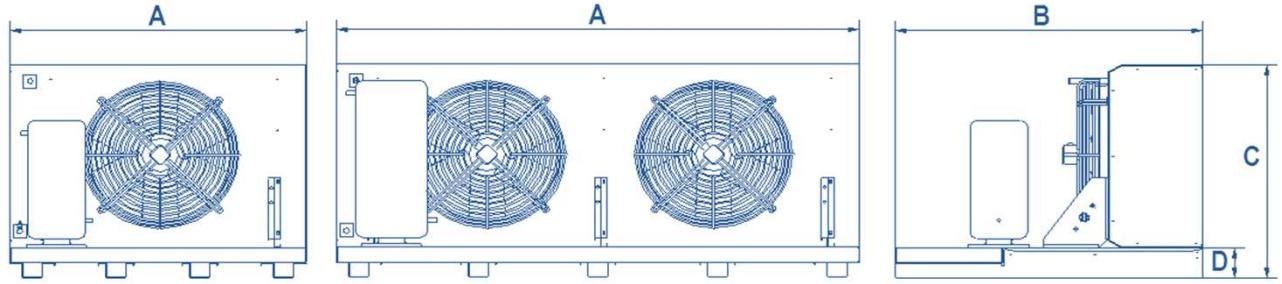

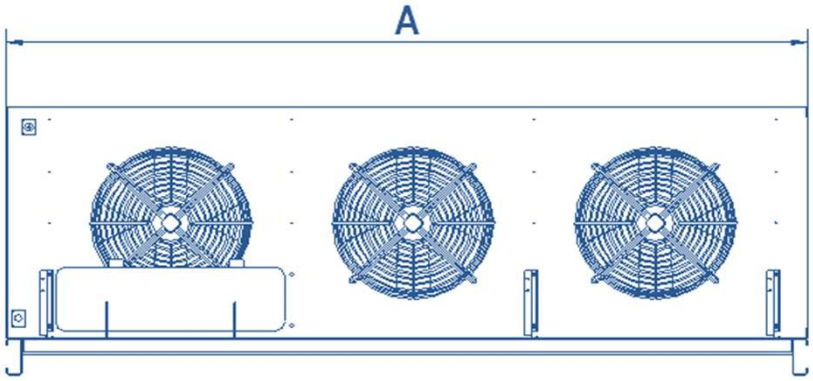

FAN Rating D450 Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1360
Power Draw	**Watts**	480
Current Draw	**Amps**	0.98


FAN Rating D500 Fan 380V		
Frequency	**Hz**	1450
Speed	**RPM**	3000
Power Draw	**Watts**	4.6
Current Draw	**Amps**	1.41


* Please NOTE: Liquid recievers are not fitted as standard. It's an optional extra
Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.


VERTICAL AIR DISCHARGE

TCVM 035
TCVM 040

	Nominal Capacity **R404A** 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Recom. Receiver Size	Dimensions						
												Length (A)	Mount Length (A')	Depth (B)	Mount Depth (B')	Height (C)	Clearance (D) *	Net Weight
DIA 350 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**mm**	**mm**	**mm**	**kg**
035.1-11-A-N	**4.9**	8.1	2498	3.1	1	220	0.58	1.34	5/8	5/8	6.5	648	548	582	522	736	400	19
035.1-11-B-N	**6.7**	12.2	2333	2.9	1	220	0.58	1.88	5/8	5/8	6.5	648	548	582	522	736	400	20
035.1-11-C-N	**7.6**	16.2	2190	2.7	1	220	0.58	2.60	5/8	5/8	6.5	648	548	582	522	736	400	22
035.1-12-A-N	**10.2**	16.2	4993	3.1	2	220	0.58	2.50	5/8	5/8	8	1146	548	582	522	736	400	28
035.1-12-B-N	**13.7**	24.3	4664	2.9	2	220	0.58	3.76	5/8	5/8	8	1146	548	582	522	736	400	34
035.1-12-C-N	**15.9**	32.4	4378	2.7	2	220	0.58	5.01	5/8	5/8	9	1146	548	582	522	736	400	36
DIA 400 FANS																		
040.1-11-B-N	**9.0**	16.2	3310	3.2	1	220	0.73	2.65	5/8	5/8	8	746	646	625	565	794	400	26
040.1-11-C-N	**10.3**	21.6	3090	3	1	220	0.73	3.54	5/8	5/8	9	746	646	625	565	794	400	28
040.1-11-E-N	**11.7**	32.4	2760	2.7	1	220	0.73	5.31	5/8	5/8	9	746	646	625	565	794	400	32
040.1-12-B-N	**17.9**	32.4	6625	3.2	2	220	0.73	5.14	5/8	5/8	12	1348	1248	625	565	794	400	44
040.1-12-C-N	**20.7**	43.2	6180	3	2	220	0.73	6.86	5/8	5/8	12	1348	1248	625	565	794	400	48
040.1-12-E-N	**23.4**	64.8	5530	2.7	2	220	0.73	10.29	7/8	3/4	12	1348	1248	625	565	794	400	54



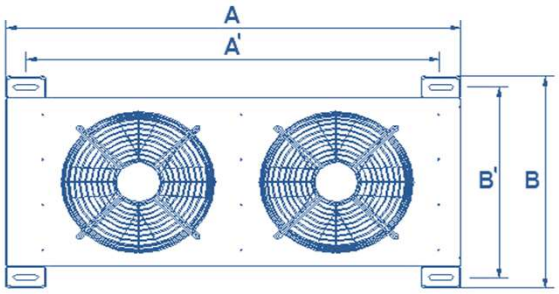



FAN Rating D350 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1400
Power Draw	**Watts**	130
Current Draw	**Amps**	0.58


FAN Rating D630 EC Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1450
Power Draw	**Watts**	3000
Current Draw	**Amps**	4.6

* 400mm is standard clearance, 700mm is also available.
Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.

VERTICAL AIR DISCHARGE

TCVM 045
TCVM 050

	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Recom. Receiver Size	Dimensions						
												Length (A)	Mount Length (A')	Depth (B)	Mount Depth (B')	Height (C)	Clearance (D) *	Net Weight
DIA 450 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**mm**	**mm**	**mm**	**kg**
045.1-11-B-N	**15.1**	22.7	5875	3.9	1	380	0.98	3.60	5/8	5/8	9	916	816	950	890	705	400	39
045.1-11-C-N	**17.5**	30.2	5556	3.7	1	380	0.98	4.80	5/8	5/8	9	916	816	950	890	705	400	42
045.1-11-E-N	**21.5**	45.4	4949	3.3	1	380	0.98	7.00	5/8	5/8	12	916	816	950	890	705	400	47
045.1-12-B-N	**31.2**	45.4	11751	3.9	2	380	0.98	7.20	7/8	3/4	12	1616	1516	950	890	705	400	70
045.1-12-C-N	**36.7**	60.5	11113	3.7	2	380	0.98	9.40	7/8	7/8	18	1616	1516	950	890	705	400	75
045.1-12-E-N	**43.0**	90.7	9898	3.3	2	380	0.98	14.00	7/8	7/8	18	1616	1516	950	890	705	400	85
DIA 500 FANS																		
050.1-11-B-N	**20.2**	34.6	7236	3.1	1	380	1.41	5.57	3/4	3/4	12	1044	944	1050	990	912	400	50
050.1-11-C-N	**23.7**	46.1	6912	3	1	380	1.41	7.43	3/4	3/4	12	1044	944	1050	990	912	400	55
050.1-11-E-N	**29.1**	69.1	6336	2.8	1	380	1.41	11.15	3/4	3/4	12	1044	944	1050	990	912	400	65
050.1-12-B-N	**41.6**	69.1	14436	3.1	2	380	1.41	10.89	1 1/8	7/8	18	1844	1744	1050	990	912	400	86
050.1-12-C-N	**47.3**	92.2	13752	3	2	380	1.41	14.52	1 1/8	7/8	18	1844	1744	1050	990	912	400	102
050.1-12-E-N	**58.2**	138.2	12672	2.8	2	380	1.41	21.78	1 1/8	7/8	18	1844	1744	1050	990	912	400	125
050.1-13-B-N	**62.9**	103.7	21672	3.1	3	380	1.41	16.20	1 1/8	7/8	25	2644	2544	1050	990	938	400	126
050.1-13-C-N	**73.8**	138.2	20628	3	3	380	1.41	21.60	1 1/8	7/8	30	2644	2544	1050	990	938	400	140
050.1-13-E-N	**87.4**	207.4	19008	2.8	3	380	1.41	32.40	1 3/8	1 1/8	35	2644	2544	1050	990	938	400	168

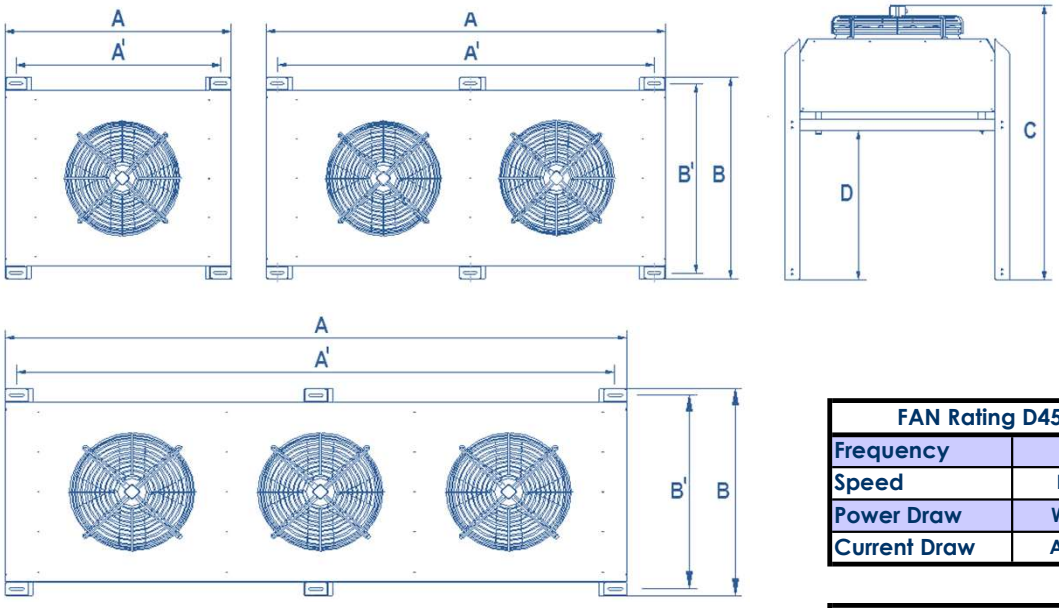

FAN Rating D450 Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1360
Power Draw	**Watts**	480
Current Draw	**Amps**	0.98


FAN Rating D500 Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1295
Power Draw	**Watts**	750
Current Draw	**Amps**	1.35

* 400mm is standard clearance, 700mm is also available.
Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.

VERTICAL AIR DISCHARGE DECK CONDENSER

TCVB/TCHB 050

DIA 500 FANS	Nominal Capacity R404A 15K TD Sea Lvl. kW	Surface Area m²	Airflow m³/hr	Face Velocity m/s	Fan Qty Qty	Fan Layout V	Fan Voltage V	Current (per fan) A	Tube Volume L	Inlet Connection In"	Outlet Connection In"	Dimensions Length (A) mm	Coil Length (A1) mm	Depth (B) mm	Coil Depth (B1) mm	Height (C) mm	Clearance (D) * mm	Net Weight kg
050.1-11-A-N	21.5	46	7956	2.8	1	1 x 1	380	1.41	4.2	5/8	5/8	979	750	1160	1040	1214	600	67
050.1-11-B-N	27.6	69	7704	2.7	1	1 x 1	380	1.41	6.2	7/8	7/8	979	750	1160	1040	1214	600	79
050.1-11-C-N	31.7	92	7452	2.7	1	1 x 1	380	1.41	8.6	7/8	7/8	979	750	1160	1040	1214	600	93
050.1-12-A-N	43.1	92	15876	2.8	2	1 x 2	380	2.82	8.1	7/8	7/8	1729	1500	1160	1040	1214	600	136
050.1-12-B-N	55.5	139	15372	2.7	2	1 x 2	380	2.82	9.6	7/8	7/8	1729	1500	1160	1040	1214	600	164
050.1-12-C-N	63.7	185	14868	2.6	2	1 x 2	380	2.82	15.1	1 1/8	1 1/8	1729	1500	1160	1040	1214	600	188
050.1-13-A-N	70.1	139	23904	2.8	3	1 x 3	380	4.23	11.0	1 1/8	1 1/8	2479	2250	1160	1040	1214	600	207
050.1-13-B-N	91.2	208	23148	2.8	3	1 x 3	380	4.23	16.4	1 1/8	1 1/8	2479	2250	1160	1040	1214	600	247
050.1-13-C-N	104.8	277	22500	2.5	3	1 x 3	380	4.23	21.9	1 3/8	1 3/8	2479	2250	1160	1040	1214	600	285
050.1-14-A-N	87.0	185	31752	3.1	4	1 x 4	380	5.64	14.2	1 1/8	1 1/8	3229	3000	1160	1040	1214	600	280
050.1-14-B-N	111.6	277	30852	2.9	4	1 x 4	380	5.64	21.3	1 3/8	1 3/8	3229	3000	1160	1040	1214	600	330
050.1-14-C-N	127.4	370	29772	2.8	4	1 x 4	380	5.64	28.4	1 3/8	1 3/8	3229	3000	1160	1040	1214	600	380
050.1-15-A-N	107.5	231	39780	2.8	5	1 x 5	380	7.05	17.6	1 3/8	1 3/8	3979	3750	1160	1040	1214	600	349
050.1-15-B-N	139.0	347	38484	2.7	5	1 x 5	380	7.05	26.5	1 5/8	1 3/8	3979	3750	1160	1040	1214	600	417
050.1-15-C-N	160.1	462	37224	2.8	5	1 x 5	380	7.05	36.7	1 5/8	1 5/8	3979	3750	1160	1040	1214	600	481
050.1-16-A-N	129.5	277	47664	2.8	6	1 x 6	380	8.46	25.7	1 3/8	1 3/8	4729	4500	1160	1040	1214	600	420
050.1-16-B-N	165.3	416	46260	2.7	6	1 x 6	380	8.46	38.6	1 5/8	1 5/8	4729	4500	1160	1040	1214	600	500
050.1-16-C-N	187.8	555	44604	2.6	6	1 x 6	380	8.46	51.5	1 5/8	1 5/8	4729	4500	1160	1040	1214	600	576
050.1-17-A-N	152.3	324	55692	2.8	7	1 x 7	380	9.87	30.0	1 5/8	1 5/8	5479	5250	1160	1000	1214	600	495
050.1-17-B-N	194.4	485	53856	2.7	7	1 x 7	380	9.87	44.9	1 5/8	1 5/8	5479	5250	1160	1000	1214	600	585
050.1-17-C-N	222.0	647	52236	2.7	7	1 x 7	380	9.87	59.9	2 1/8	2 1/8	5479	5250	1160	1000	1214	600	697
050.1-18-A-N	174.0	370	63504	2.8	8	1 x 8	380	11.28	34.2	1 5/8	1 5/8	5479	5250	1160	1040	1214	600	566
050.1-18-B-N	223.2	555	61524	2.7	8	1 x 8	380	11.28	51.3	2 1/8	2 1/8	5479	5250	1160	1040	1214	600	696
050.1-18-C-N	254.7	740	43560	2.7	8	1 x 8	380	11.28	68.4	2 1/8	2 1/8	5479	5250	1160	1040	1214	600	798

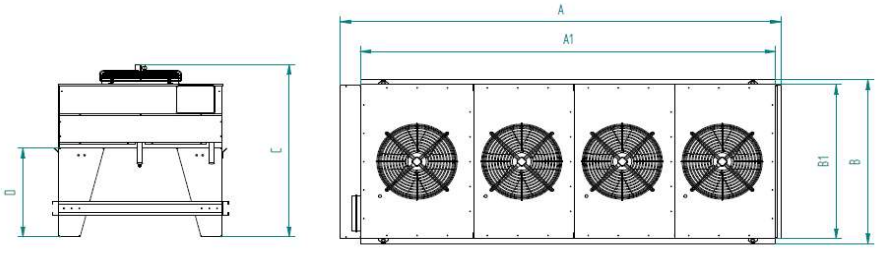

FAN Rating D500 AC Fan 380V		
Frequency	Hz	50
Speed	RPM	1295
Power Draw	Watts	750
Current Draw	Amps	1.35

FAN Rating D500 EC Fan 380V		
Frequency	Hz	50
Speed	RPM	1600
Power Draw	Watts	1000
Current Draw	Amps	1.6

* 650mm is standard ground clearance.
* Leg inserts of 650mm, 1000mm & 1150mm to increase clearance optinal
* Leg inserts to be fitted on site - not suitable for transport


Fin Spacing: 2.2mm


Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.


VERTICAL AIR DISCHARGE DECK CONDENSER


TCV/H 063.2


DIA 630 FANS	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Layout	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Fin length/fan	Dimensions						
													Length (A)	Mount Length (A')	Depth (B)	Mount Depth (B')	Height (C)	Clearance (D) *	Net Weight
	kW	m²	m³/hr	m/s	Qty	V	V	A	L	In"	In"	mm	mm	mm	mm	mm	mm	mm	kg
063.2-11-B-N	48.4	91.5	15732	3.9	1	1 X1	380	4.78	9.70	7/8	7/8	1000	1224	976	1280	1100	1180	600	298
063.2-11-C-N	56.6	122	14976	3.7	1	1 X1	380	4.78	12.90	1 1/8	1 1/8	1000	1224	976	1280	1100	1180	600	386
063.2-12-B-N	96.8	183.1	31464	3.9	2	1 X 2	380	4.78	18.80	1 3/8	1 3/8	2000	2227	1980	1280	1100	1180	600	338
063.2-12-C-N	113.2	244.1	29988	3.7	2	1 X 2	380	4.78	25.10	1 3/8	1 3/8	2000	2227	1980	1280	1100	1180	600	480
063.2-13-B-N	145.1	274.6	47196	3.9	3	1 X 3	380	4.78	27.90	1 5/8	1 5/8	3000	3231	2984	1280	1100	1180	600	486
063.2-13-C-N	171.3	366	44964	3.9	3	1 X 3	380	4.78	37.20	1 5/8	1 5/8	3000	3231	2984	1280	1100	1180	600	574
063.2-14-B-N	169.1	366.1	51120	3.2	4	1 X 4	380	4.78	37.01	1 5/8	1 5/8	4000	4256	3988	1280	1100	1180	600	580
063.2-14-C-N	225.9	488.2	48852	3	4	1 X 4	380	4.78	49.35	2 1/8	2 1/8	4000	4256	3988	1280	1100	1180	600	668
063.2-15-B-N	204.3	457.7	64008	4	5	1 X 5	380	4.78	46.12	2 1/8	2 1/8	5000	5258	4992	1280	1100	1180	600	750
063.2-15-C-N	244.5	610.2	61272	3	5	1 X 5	380	4.78	61.50	2 1/8	2 1/8	5000	5258	4992	1280	1100	1180	600	836
063.2-16-B-N	255.8	549.2	76536	3.2	6	1 X 6	380	4.78	55.23	2 1/8	2 1/8	6000	6258	5996	1280	1100	1180	600	720
063.2-16-C-N	297.3	732.3	73260	3	6	1 X 6	380	4.78	73.65	2 1/8	2 1/8	6000	6258	5996	1280	1100	1180	600	1002
063.2-22-B-N	193.6	366	62928	3.9	4	2 X 2	380	4.78	37 3/5	2*1 3/8	2*1 3/8	2000	2227	1980	2400	2220	1180	600	784
063.2-22-C-N	226.4	488.2	59976	3.7	4	2 X 2	380	4.78	50.10	2*1 3/8	2*1 3/8	2000	2227	1980	2400	2220	1180	600	960
063.2-23-B-N	290.3	549.2	94356	3.9	6	2 X 3	380	4.78	55.80	2*1 5/8	2*1 5/8	3000	3231	2984	2400	2220	1180	600	972
063.2-23-C-N	342.7	732.3	89892	3.7	6	2 X 3	380	4.78	74.40	2*1 5/8"	2*1 5/8"	3000	3231	2984	2400	2220	1180	600	1148

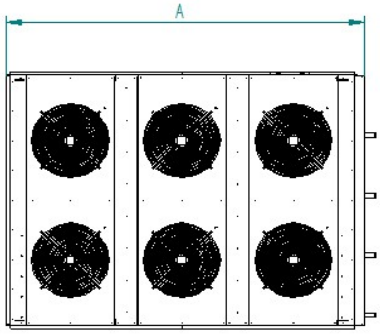


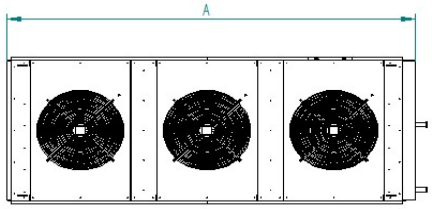

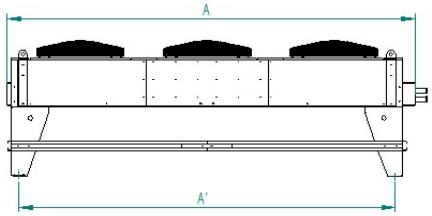



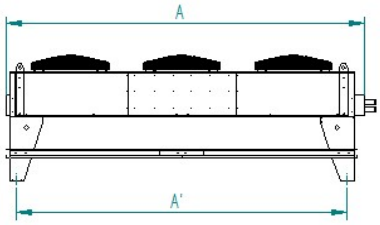

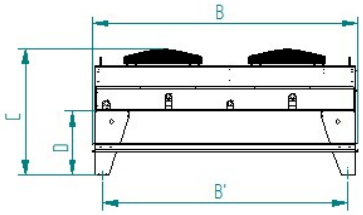

FAN Rating D500 AC Fan 380V		
Frequency	Hz	50
Speed	RPM	1295
Power Draw	Watts	750
Current Draw	Amps	1.35


FAN Rating D630 AC Fan 380V		
Frequency	Hz	50
Speed	RPM	1320
Power Draw	Watts	2630
Current Draw	Amps	4.78


* 400mm is standard clearance, Sheet metal spacers to raise, also available
* Sheet metal spacers needs to be insterted during site fitment.
Fin Spacing:
Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.


VERTICAL AIR DISCHARGE DECK CONDENSER


TCV/H 080.2


DIA 800 FANS	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Layout	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Fin length	Dimensions						Net Weight
													Length (A)	Mount Length (A')	Depth (B)	Mount Depth (B')	Height (C)	Clearance (D)	
	kW	m²	m³/hr	m/s	Qty	V	V	A	L	In"	In"	mm	mm	mm	mm	mm	mm	mm	kg
080.2-12-B-N	136.9	256.3	44856	4	2	1 x 2	380	3.90	26.1	1 5/8	1 5/8	2800	3027	2780	1280	1100	1336	600	327
080.2-12-C-N	161.4	341.7	42732	3.8	2	1 x 2	380	3.90	34.8	1 5/8	1 5/8	2800	3027	2780	1280	1100	1336	600	363
080.2-13-B-N	197.9	384.4	67284	4	3	1 x 3	380	3.90	38.8	1 5/8	1 5/8	4200	4427	4180	1280	1100	1336	600	491
080.2-13-C-N	238.8	512.6	64076	3.8	3	1 x 3	380	3.90	51.8	2 1/8	2 1/8	4200	4427	4180	1280	1100	1336	600	587
080.2-14-B-N	273.7	512.6	89695	4	4	1 x 4	380	3.90	51.6	2 1/8	2 1/8	5600	5827	5580	1280	1100	1336	600	674
080.2-14-C-N	322.8	683.5	85482	3.8	4	1 x 4	380	3.90	68.8	2 1/8	2 1/8	5600	5827	5580	1280	1100	1336	600	746
080.2-22-B-N	273.8	512.6	89712	4	4	2 x 2	380	3.90	52.2	2*1 5/8	2*1 5/8	2800	3027	2780	2400	2220	1336	600	576
080.2-22-C-N	322.8	683.5	85464	3.8	4	2 x 2	380	3.90	65.6	2*1 5/8	2*1 5/8	2800	3027	2780	2400	2220	1336	600	636
080.2-23-B-N	395.8	768.9	134568	4	6	2 X 3	380	3.90	77.7	2*1 5/8	2*1 5/8	4200	4427	4180	2400	2220	1336	600	865
080.2-23-C-N	477.6	1025.2	128152	3.8	6	2 X 3	380	3.90	103.6	2*2 1/8	2*2 1/8	4200	4427	4128	2400	2220	1336	600	1025
080.2-24-B-N	547.4	768.9	179390	4	8	2 X 3	380	3.90	77.7	2*2 1/8	2*2 1/8	5600	5827	5580	2400	2220	1336	600	1186
080.2-24-C-N	645.6	1025.2	170964	3.8	8	2 X 3	380	3.90	103.6	2*2 1/8	2*2 1/8	5600	5827	5580	2400	2220	1336	600	1306

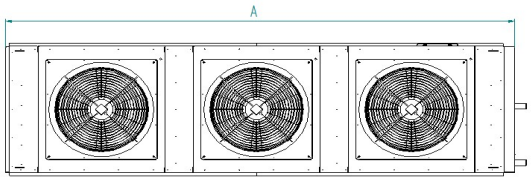


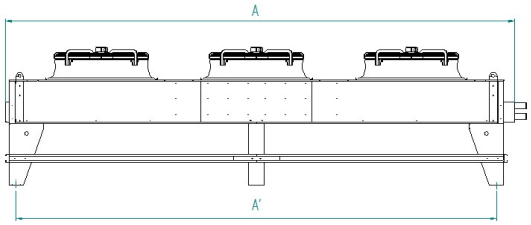



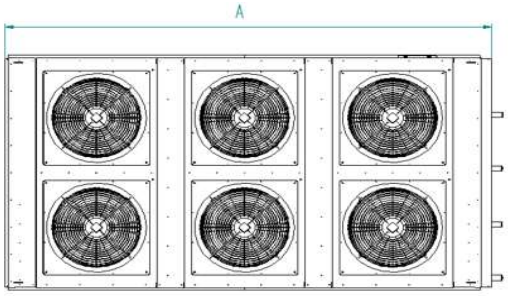

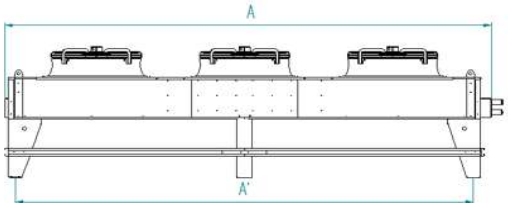

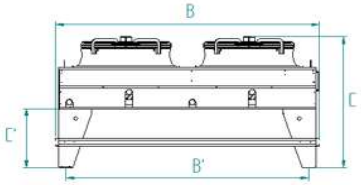

FAN Rating D800 Fan 380V EC		
Frequency	Hz	50
Speed	RPM	1020
Power Draw	Watts	2560
Current Draw	Amps	3.9

FAN Rating D800 Fan 380V AC		
Frequency	Hz	50
Speed	RPM	880
Power Draw	Watts	1940
Current Draw	Amps	3.9


Fin Spacing: 2.4mm


Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.


VERTICAL AIR DISCHARGE VEE SHAPED CONDENSER


TCD 050 (2 FAN ROWS)

DIA 500 Fans	Nominal Capacity R404A 15K TD Sea Lvl. kW	Surface Area m²	Airflow m³/hr	Face Velocity m/s	Fan Qty	Rows Deep Per Side	Fan Voltage V	Current (per fan) A	Tube Volume L	Inlet Connection In"	Outlet Connection In"	Dimensions Length (A) mm	Depth (B) mm	Height (C) mm	Net Weight kg
050.1-22-B-N	**99.8**	99.8	27900	3.0	4	3	380	1.41	21.6	1 3/8"	1 1/8"	1780	1625	945	235
050.1-22-C-N	**116.1**	116.1	26496	2.9	4	4	380	1.41	28.9	1 3/8"	1 1/8"	1780	1625	945	270
050.1-23-B-N	**150.8**	150.8	41868	3.0	6	3	380	1.41	32.1	1 5/8"	1 3/8"	2580	1625	945	320
050.1-23-C-N	**176.8**	176.8	39744	2.9	6	4	380	1.41	42.7	1 5/8"	1 3/8"	2580	1625	945	385
050.1-24-B-N	**201.9**	201.9	55800	3.0	8	3	380	1.41	42.5	1 5/8"	1 3/8"	3380	1625	945	440
050.1-24-C-N	**240.3**	240.3	52992	2.9	8	4	380	1.41	56.6	2 1/8"	1 5/8"	3380	1625	945	490
050.1-25-B-N	**254.7**	254.7	69768	3.0	10	3	380	1.41	52.9	2 1/8"	1 5/8"	4180	1625	945	535
050.1-25-C-N	**299.3**	299.3	66240	2.9	10	4	380	1.41	70.5	2 1/8"	1 5/8"	4180	1625	945	600
050.1-26-C-N	**353.5**	353.5	79488	3.0	12	4	380	1.41	84.4	2 1/8"	2 1/8"	4980	1625	945	735

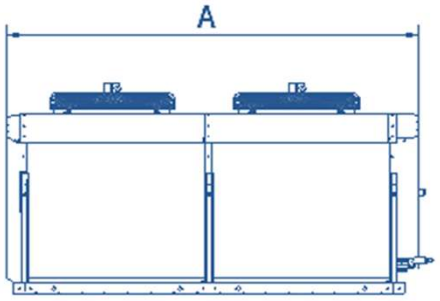

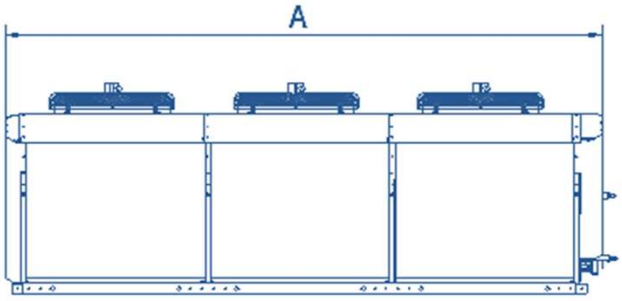

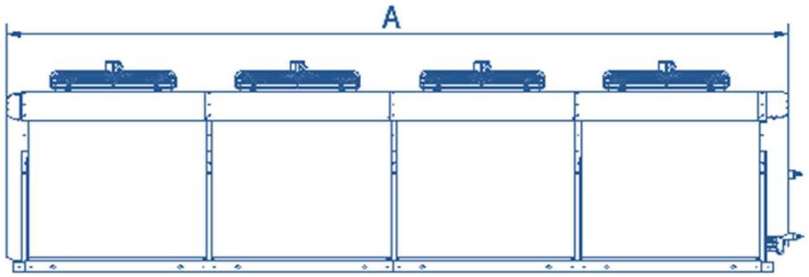

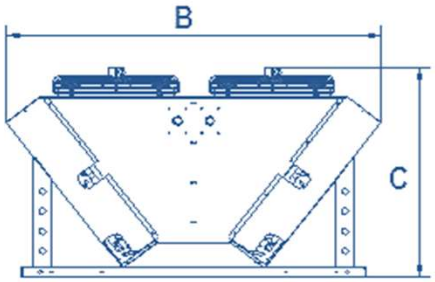

FAN Rating D500 AC Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1295
Power Draw	**Watts**	750
Current Draw	**Amps**	1.35


FAN Rating D500 EC Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1600
Power Draw	**Watts**	1000
Current Draw	**Amps**	1.6


Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.


VERTICAL AIR DISCHARGE VEE SHAPED CONDENSER


TCD 063 (1 FAN ROW)

DIA 630 Fans *	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Rows Deep Per Side	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Dimensions			Net Weight
												Length (A)	Depth (B)	Height (C)	
	kW	m²	m³/hr	m/s	Qty	V	V	A	L	In"	In"	mm	mm	mm	kg
063.1-12-B-L	90.4	227.6	24120	2.6	2	3	380	2.48	21.6	7/8"	7/8"	1800	1060	1080	180
063.1-12-B-N	102.7	227.6	32472	3.5	2	3	380	4.78	21.6	7/8"	7/8"	1800	1060	1080	180
063.1-12-C-L	105.7	303.4	22968	2.5	2	4	380	2.48	28.9	11/8"	11/8"	1800	1060	1080	230
063.1-12-C-N	127.9	303.4	31212	3.4	2	4	380	4.78	28.9	11/8"	11/8"	1800	1060	1080	230
063.1-13-B-L	138.6	341.3	36072	2.6	3	3	380	2.48	32.1	11/8"	11/8"	2600	1060	1080	270
063.1-13-B-N	163.5	341.3	48816	3.5	3	3	380	4.78	32.1	11/8"	11/8"	2600	1060	1080	270
063.1-13-C-L	157.4	455.1	34416	2.5	3	4	380	2.48	42.7	13/8"	13/8"	2600	1060	1080	340
063.1-13-C-N	187.3	455.1	46836	3.4	3	4	380	4.78	42.7	13/8"	13/8"	2600	1060	1080	340
063.1-14-B-L	180.5	455.1	48096	2.6	4	3	380	2.48	42.7	13/8"	13/8"	3400	1060	1080	355
063.1-14-B-N	205.2	455.1	64944	3.5	4	3	380	4.78	42.7	13/8"	13/8"	3400	1060	1080	355
063.1-14-C-L	210.2	606.8	45720	2.5	4	4	380	2.48	56.6	13/8"	13/8"	3400	1060	1080	450
063.1-14-C-N	257.7	606.8	62424	3.4	4	4	380	4.78	56.6	13/8"	13/8"	3400	1060	1080	450

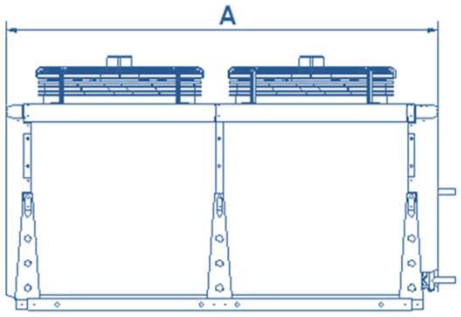

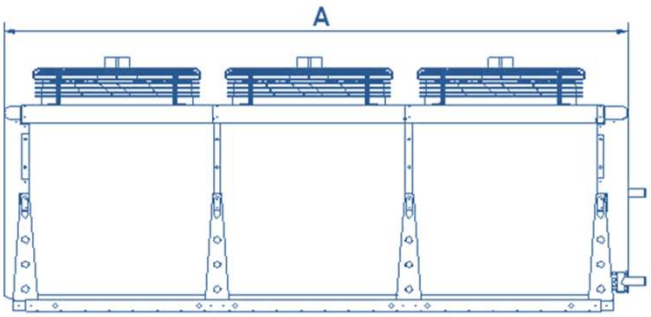

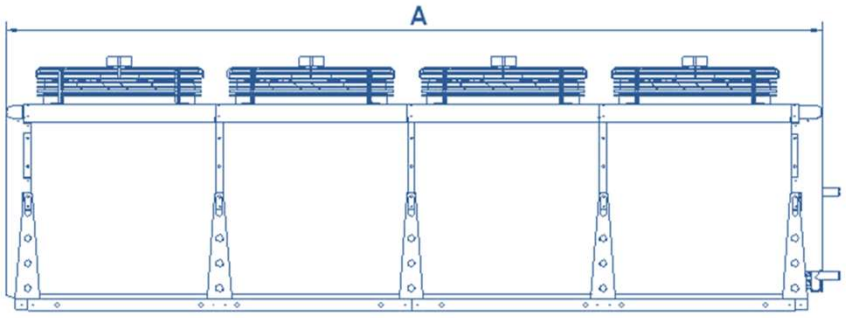



* Availaible in Low (L) or Normal (N) Power fan ratings - see fan data below

Fin Spacing: 2.4mm
Capacities based on
80°C Hot Gas,
45°C Condensing,
30°C Ambient Temps.


FAN Rating D630(AD) AC Fan		
Frequency	Hz	50
Speed	RPM	1320
Power Draw	Watts	2630
Current Draw	Amps	4.78


FAN Rating D630 EC Fan 380V		
Frequency	Hz	50
Speed	RPM	1450
Power Draw	Watts	3000
Current Draw	Amps	4.6


VERTICAL AIR DISCHARGE VEE SHAPED CONDENSER


TCD 063 (2 FAN ROWS)

DIA 630 Fans	Nominal Capacity R404A 15K TD Sea Lvl. kW	Surface Area m²	Airflow m³/hr	Face Velocity m/s	Fan Qty Qty	Rows Deep Per Side V	Fan Voltage V	Current (per fan) A	Tube Volume L	Inlet Connection In"	Outlet Connection In"	Dimensions Length (A) mm	Depth (B) mm	Height (C) mm	Net Weight kg
063.1-22-B-N	**266.0**	640	70236	2.7	4	3	380	4.78	60.4	1 5/8"	1 5/8"	2200	2200	2115	500
063.1-22-C-N	**308.1**	853.2	68508	2.6	4	4	380	4.78	80.5	1 5/8"	1 5/8"	2200	2200	2115	540
063.1-23-B-N	**398.6**	960	105372	2.7	6	3	380	4.78	89.0	1 5/8"	1 5/8"	3200	2200	2115	810
063.1-23-C-N	**462.1**	1280	102744	2.6	6	4	380	4.78	119.6	2 1/8"	2 1/8"	3200	2200	2115	870
063.1-24-B-N	**527.4**	1280	140256	2.7	8	3	380	4.78	118.1	2 1/8"	2 1/8"	4200	2200	2115	1125
063.1-24-C-N	**617.8**	1706	136980	2.6	8	4	380	4.78	158.6	2 1/8"	2 1/8"	4200	2200	2115	1200
063.1-25-B-N	**639.5**	1600	175320	2.7	10	3	380	4.78	147.2	2 1/8"	2 1/8"	5200	2200	2115	1440
063.1-25-C-N	**762.5**	2133.4	171216	2.6	10	4	380	4.78	197.7	2 1/8"	2 1/8"	5200	2200	2115	1520



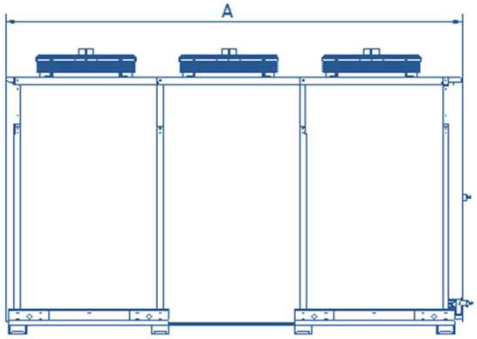

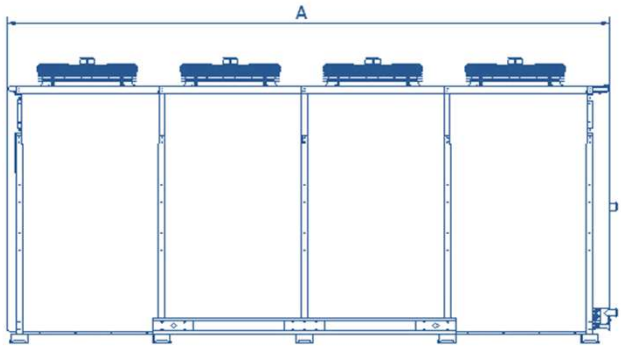

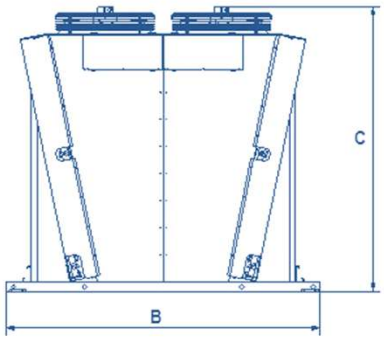

Fin Spacing: 2.4mm
Capacities based on
80°C Hot Gas,
45°C Condensing,
30°C Ambient Temps.


FAN Rating D630(AD) AC Fan		
Frequency	**Hz**	50
Speed	**RPM**	1320
Power Draw	**Watts**	2630
Current Draw	**Amps**	4.78


FAN Rating D630 EC Fan 380V		
Frequency	**Hz**	50
Speed	**RPM**	1450
Power Draw	**Watts**	3000
Current Draw	**Amps**	4.6


VERTICAL AIR DISCHARGE VEE SHAPED CONDENSER

TCD 080 (2 FAN ROWS)

DIA 800 Fans	Nominal Capacity R404A 15K TD Sea Lvl. kW	Surface Area m²	Airflow m³/hr	Face Velocity m/s	Fan Qty Qty	Rows Deep Per Side V	Fan Voltage V	Current (per fan) A	Tube Volume L	Inlet Connection In"	Outlet Connection In"	Dimensions Length (A) mm	Depth (B) mm	Height (C) mm	Net Weight kg
080.1-21-B-N	**151.1**	353	42372	2.7	2	3	380	3.90	36.1	1 1/8	7/8	2200	2200	2115	500
080.1-21-C-N	**175.5**	470.8	41148	2.6	2	4	380	3.90	48.6	1 1/8	7/8	2200	2200	2115	540
080.1-22-B-N	**297.5**	706	84600	2.7	4	3	380	3.90	67.5	1 5/8	1 3/8	3200	2200	2115	810
080.1-22-C-N	**354.9**	941.6	82476	2.6	4	4	380	3.90	92.8	1 5/8	1 3/8	3200	2200	2115	870
080.1-23-B-N	**457.5**	1059	126900	2.7	6	3	380	3.90	103.5	2 1/8	1 5/8	4200	2200	2115	1125
080.1-23-C-N	**535.3**	1412	123408	2.6	6	4	380	3.90	141.2	2 1/8	1 5/8	4200	2200	2115	1200
080.1-24-B-N	**597.3**	1412	169524	2.7	8	3	380	3.90	137.4	2 5/8	1 5/8	5200	2200	2115	1440
080.1-24-C-N	**709.6**	1883	164952	2.6	8	4	380	3.90	187.6	2 5/8	1 5/8	5200	2200	2115	1520
080.1-25-B-N	**763.2**	1765	211896	2.7	10	3	380	3.90	173.9	2 5/8	2 1/8	5200	2200	2115	1440
080.1-25-C-N	**862.2**	2353	206208	2.6	10	4	380	3.90	233.6	2 5/8	2 1/8	5200	2200	2115	1520

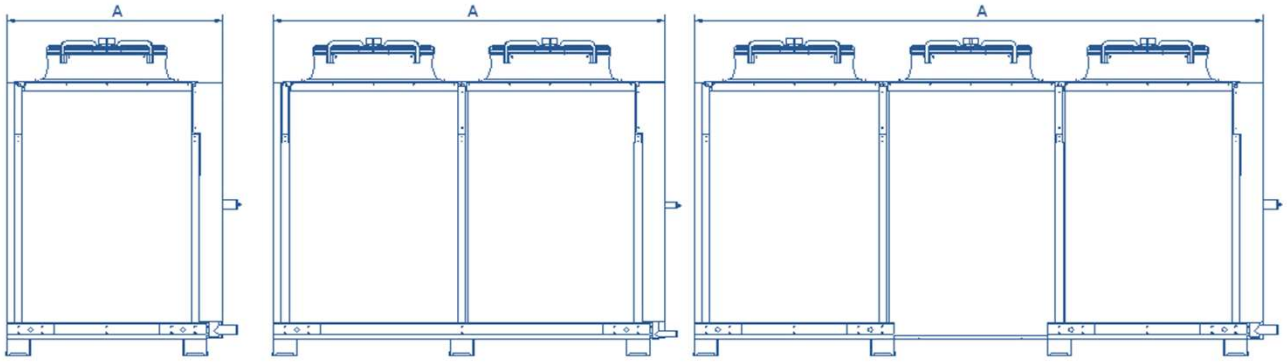

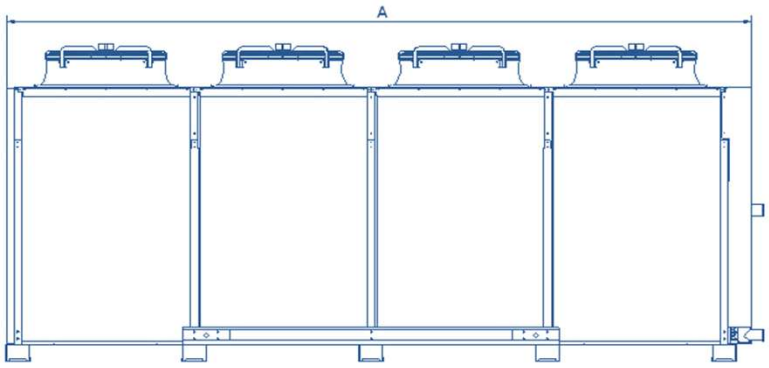

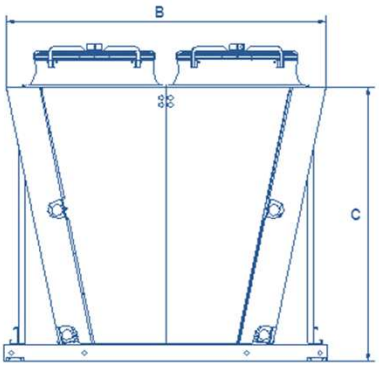

Fin Spacing: 2.4mm
Capacities based on
80°C Hot Gas,
45°C Condensing,
30°C Ambient Temps.


FAN Rating D800 Fan 380V AC		
Frequency	**Hz**	50
Speed	**RPM**	880
Power Draw	**Watts**	1940
Current Draw	**Amps**	3.9

FAN Rating D800 Fan 380V EC		
Frequency	**Hz**	50
Speed	**RPM**	1020
Power Draw	**Watts**	2560
Current Draw	**Amps**	3.9

HORIZONTAL AIR DISCHARGE PACK UNIT

TCPH 035
TCPH 040

	Nominal Capacity **R404A** 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Receiver Size	Dimensions			Nett Weight
												Length (A)	Depth (B)	Height (C)	
DIA 350 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**kg**
035.1-11-B-N	**8.6**	20.5	2729	1.9	1	220	0.58	3.29	5/8"	5/8"	6 1/2	767	904	940	104
035.1-11-C-N	**9.8**	27.4	2657	1.9	1	220	0.58	4.39	5/8"	5/8"	6 1/2	767	904	940	107
DIA 400 FANS															
040.1-11-B-N	**10.6**	20.5	3716	2.5	1	220	0.73	3.29	5/8"	5/8"	9	767	904	940	106
040.1-11-C-N	**12.2**	27.4	3568	2.5	1	220	0.73	4.39	5/8"	5/8"	9	767	904	940	108
040.1-12-B-N	**22.8**	47.4	7762	2.4	2	220	0.73	7.33	3/4"	5/8"	12	1538	904	940	173
040.1-12-C-N	**26.4**	63.2	7524	2.3	2	220	0.73	9.77	3/4"	5/8"	12	1538	904	940	180

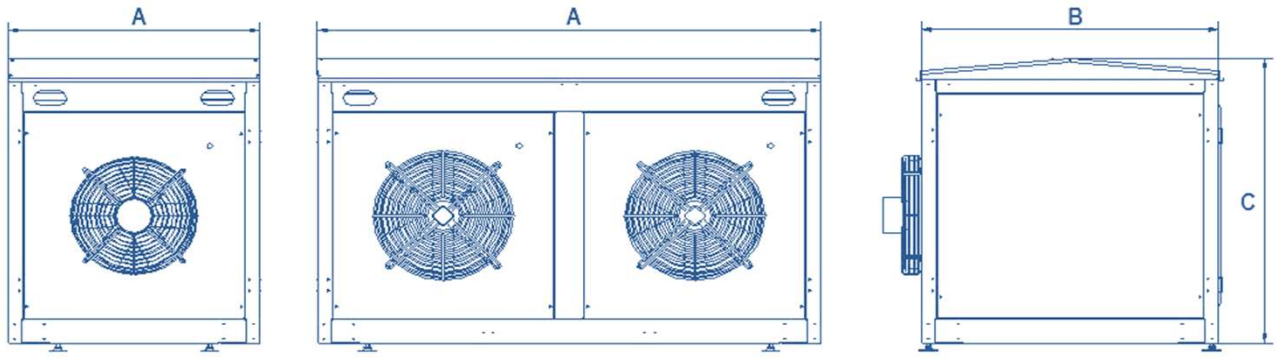

FAN Rating D350 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1400
Power Draw	**Watts**	130
Current Draw	**Amps**	0.58


TCPH Horizontal packs can be ordered with or without roofs, for stacking.
It is not recommended that more than two packs high are stacked.
Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.

FAN Rating D400 Fan 220V		
Frequency	**Hz**	1450
Speed	**RPM**	3000
Power Draw	**Watts**	4.6
Current Draw	**Amps**	0.73

HORIZONTAL AIR DISCHARGE PACK UNIT

TCPH 050

DIA 500 FANS	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Receiver Size	Dimensions Length (A)	Dimensions Depth (B)	Dimensions Height (C)	Nett Weight
	kW	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**kg**
050.1-11-B-N	**14.0**	20.5	5778	4.1	1	380	1.41	3.29	5/8"	5/8"	12	767	904	940	110
050.1-11-C-N	**16.5**	27.4	5276	3.7	1	380	1.41	4.39	5/8"	5/8"	12	767	904	940	113
050.1-11-E-N	**20.6**	51	5101	3.6	1	380	1.41	6.59	5/8"	5/8"	12	767	904	940	118
050.1-12-B-N	**30.9**	47.4	12749	3.9	2	380	1.41	7.33	3/4"	5/8"	18	1538	904	940	182
050.1-12-C-N	**35.8**	63.2	11745	3.6	2	380	1.41	9.77	3/4"	5/8"	18	1538	904	940	189
050.1-12-E-N	**40.4**	94.8	10144	3.1	2	380	1.41	14.66	7/8"	3/4"	18	1538	904	940	202
050.1-13-C-N	**53.7**	94.8	17618	3.6	3	380	1.41	15.15	11/8"	7/8"	35	2300	904	940	265
050.1-13-E-N	**60.6**	142.2	15216	3.1	3	380	1.41	22.73	11/8"	11/8"	35	2300	904	940	286

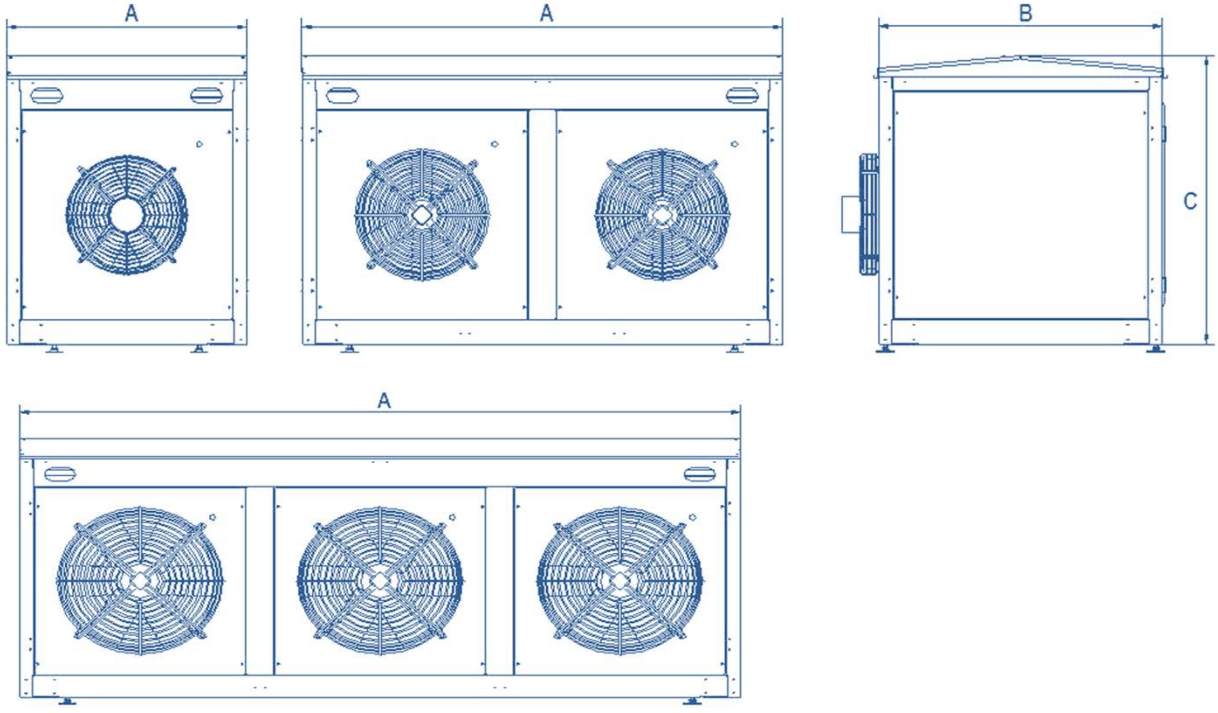


TCPH Horizontal packs can be ordered with or without roofs, for stacking.
It is not recommended that more than two packs high are stacked.
Fin Spacing: 2.2mm
Capacities based on 80°C Hot Gas,
45°C Condensing, 30°C Ambient Temps.

FAN Rating D500 Fan 380V		
Frequency	**Hz**	1450
Speed	**RPM**	3000
Power Draw	**Watts**	4.6
Current Draw	**Amps**	1.41

VERTICAL AIR DISCHARGE PACK UNIT

TCPV 035
TCPV 040

	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Receiver Size	Dimensions			Nett Weight
												Length (A)	Depth (B)	Height (C)	
DIA 350 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**kg**
035.1-11-A-N	**5.3**	9.5	2556	2.8	1	220	0.58	1.44	5/8"	5/8"	6 1/2	750	507	936	53
035.1-11-B-N	**6.9**	14.2	2412	2.7	1	220	0.58	2.17	5/8"	5/8"	6 1/2	750	507	936	55
035.1-11-C-N	**8.3**	19	2268	2.5	1	220	0.58	2.89	5/8"	5/8"	8	750	507	936	57
035.1-12-B-N	**15.2**	29.5	4896	2.6	2	220	0.58	4.34	5/8"	5/8"	8	1352	507	936	81
035.1-12-C-N	**17.6**	39.3	4644	2.5	2	220	0.58	5.78	5/8"	5/8"	8	1352	507	936	86
035.1-13-B-N	**23.3**	46.7	7488	2.5	3	220	0.58	6.28	5/8"	5/8"	12	2033	507	936	104
035.1-13-C-N	**27.1**	62.2	7128	2.4	3	220	0.58	8.80	5/8"	5/8"	12	2033	507	936	110
DIA 400 FANS															
040.1-11-B-N	**9.6**	16.9	3492	3.2	1	220	0.73	2.57	5/8"	5/8"	6 1/2	835	557	936	61
040.1-11-C-N	**11.1**	22.6	3276	3.0	1	220	0.73	3.42	5/8"	5/8"	6 1/2	835	557	936	64
040.1-11-E-N	**14.1**	33.9	2916	2.7	1	220	0.73	5.14	5/8"	5/8"	8	835	557	936	68
040.1-12-B-N	**22.6**	39.2	8006	3.2	2	220	1.46	2.57	5/8"	5/8"	6 1/2	1437	557	936	93
040.1-12-C-N	**26.0**	52.3	7488	3.0	2	220	1.46	3.42	5/8"	5/8"	6 1/2	1437	557	936	97
040.1-12-E-N	**29.8**	78.4	6755	2.7	2	220	1.46	5.14	5/8"	5/8"	8	1437	557	936	104
040.1-13-B-N	**30.5**	51.9	10587	3.2	3	220	2.19	2.57	7/8"	7/8"	8	2118	557	936	123
040.1-13-C-N	**36.8**	69.2	10188	3.0	3	220	2.19	3.42	7/8"	7/8"	8	2118	557	936	127
040.1-13-E-N	**40.2**	103.7	8496	2.7	3	220	2.19	2.57	7/8"	7/8"	8	2118	557	936	134

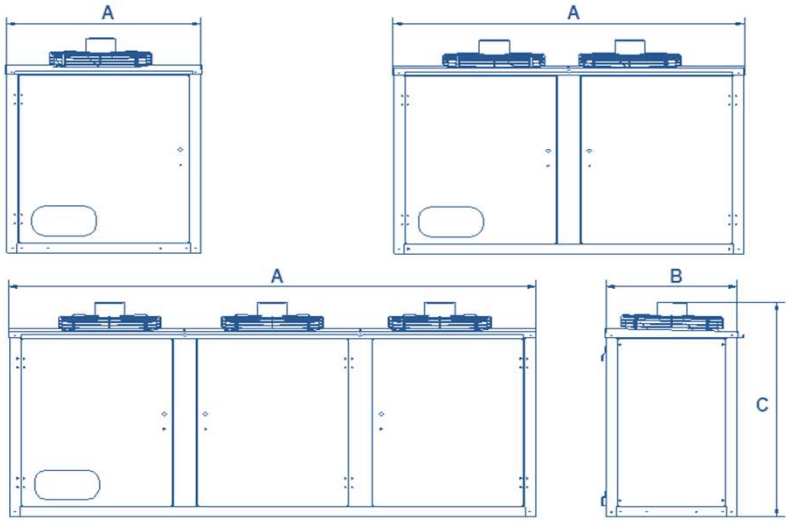

FAN Rating D350 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1400
Power Draw	**Watts**	130
Current Draw	**Amps**	0.58


FAN Rating D400 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1430
Power Draw	**Watts**	1450
Current Draw	**Amps**	3000


TCPV Vertical packs are wall mounted as standard, but can be ordered with feet for floor mounting if required.
* Hydro Fin material being standard
Fin Spacing: 2.1mm
Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.


HORIZONTAL AIR DISCHARGE COOL-PACK UNIT


TCCP 035
TCCP 040
TCCP 050

	Nominal Capacity R404A 15K TD Sea Lvl.	Surface Area	Airflow	Face Velocity	Fan Qty	Fan Voltage	Current (per fan)	Tube Volume	Inlet Connection	Outlet Connection	Receiver Size	Dimensions					
												Length (A)	Mount Length (A')	Depth (B)	Mount Depth (B')	Height (C)	Net Weight
DIA 350 FANS	**kW**	**m²**	**m³/hr**	**m/s**	**Qty**	**V**	**A**	**L**	**In"**	**In"**	**L**	**mm**	**mm**	**mm**	**mm**	**mm**	**kg**
035.3-11-A-N	**5.9**	9.5	2556	2.8	1	220	0.58	1.48	5/8	5/8	5	1000	655	475	420	722	55
035.3-11-B-N	**7.9**	14.2	2412	2.7	1	220	0.58	2.21	5/8	5/8	5	1000	655	475	420	722	56
035.3-11-C-N	**9.3**	19	2304	2.5	1	220	0.58	2.95	5/8	5/8	5	1000	655	475	420	722	57
DIA 400 FANS																	
040.1-11-B-N	**14.0**	33.4	4068	1.9	1	220	0.73	5.01	5/8	5/8	6	1300	755	475	420	893	70
DIA 500 FANS																	
050.2-11-A-N	**14.4**	21.7	7308	3.6	1	220	2.95	3.34	5/8	5/8	6	1300	755	475	420	893	68
050.2-11-B-N	**20.6**	32.5	6984	3.3	1	220	2.95	5.01	5/8	5/8	6	1300	755	475	420	893	71
050.2-11-C-N	**22.9**	43.3	5570	3.3	1	220	2.95	6.10	5/8	5/8	6	1300	755	475	420	893	74
050.2-11-E-N	**27.9**	65	6570	3.2	1	220	2.95	9.76	5/8	5/8	6	1300	755	475	420	893	78
050.2-21-B-N	**40.0**	44.5	13968	3.3	1	220	2.95	5.74	7/8	7/8	12	1300	755	475	420	1693	74
050.2-21-C-N	**46.2**	86.7	13140	3.2	2	220	2.95	12.20	7/8	7/8	12	1300	755	475	420	1693	88
050.2-21-E-N	**54.5**	130	12060	2.9	2	220	2.95	19.52	1 1/8	1 1/8	18	1300	755	475	420	1693	105

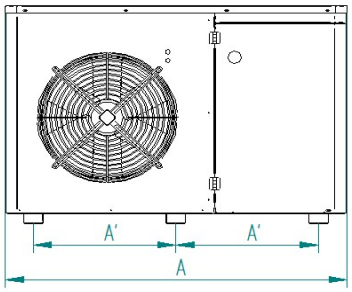



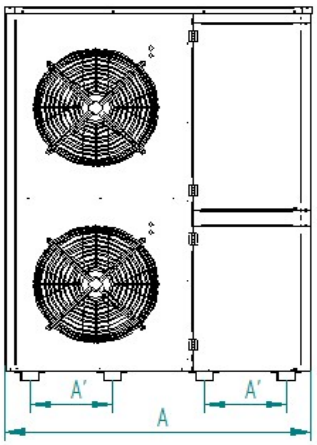

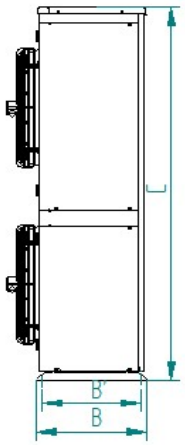

FAN Rating D350 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1400
Power Draw	**Watts**	130
Current Draw	**Amps**	0.58

FAN Rating D400 Fan 220V		
Frequency	**Hz**	50
Speed	**RPM**	1430
Power Draw	**Watts**	160
Current Draw	**Amps**	0.73

FAN Rating D500 Fan 230V		
Frequency	**Hz**	50
Speed	**RPM**	1300
Power Draw	**Watts**	680
Current Draw	**Amps**	3


Hydro coated Fin material - 2.1mm fin spacing
Liquid recievers, not standard fitment
Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.


HORIZONTAL AIR DISCHARGE SMALL CONDENSERS

TCHS 025
TCHS 031
TCHS 035

DIA 250 FANS	Coil code only	Nominal Capacity R404A 15K TD Sea Lvl. W	Surface Area m²	Airflow m³/hr	Face Velocity m/s	Fan Qty	Fan Voltage V	Current (per fan) A	Tube Volume L	Inlet Connection In"	Outlet Connection In"	Receiver Size L	Dimensions Length (A) mm	Depth (B) mm	Height (C) mm	Net Weight kg	
025-11-A-1100	M64281201*	1100	3	720	1.8	1	220	0.42	0.46	3/8"	3/8"	1.1	340	481	305	7.2	**
025-11-B-1500	M64281301*	1500	2.9	648	2.4	1	220	0.42	0.70	3/8"	3/8"	1.1	340	481	305	7.8	**
025-11-C-1900	M64281401*	1900	3.9	612	2.3	1	220	0.42	0.90	3/8"	3/8"	1.1	340	481	305	8.3	**
025-11-C-2100	M64281501*	2100	5.1	612	1.8	1	220	0.42	1.10	3/8"	3/8"	2	400	481	305	9.4	**
025-12-B-3200	M64282341	3200	6.0	1224	2.3	2	220	0.42	1.28	1/2"	3/8"	2	620	481	305	11.5	**
025-12-C-4300	M64282431	4300	9.5	1296	2.0	2	220	0.42	2.00	3/8"	3/8"	2	720	480	305	12.5	**
025-13-C-6900	M64283431	6900	17.8	1800	2.0	3	220	0.42	2.76	5/8"	5/8"	2	1000	600	301	16.5	
DIA 310 FANS																	
031.11-A-3200	M64281601*	3200	5.1	1584	3.1	1	220	0.38	0.84	3/8"	3/8"	2	500	580	375	11.4	
031.11-B-4000	M64281701*	4000	7.7	1440	2.8	1	220	0.38	1.26	3/8"	3/8"	2	500	580	375	12.8	
031.11-C-5000	M64281801*	5000	10.2	1332	2.6	1	220	0.38	1.68	3/8"	3/8"	2	500	580	375	14.2	
031.11-E-6000	M64281901*	6000	16.4	1260	2.3	1	220	0.38	2.77	5/8"	3/8"	2	500	580	400	14.2	***
031.12-A-7000	M64282601*	7000	11.5	3312	2.9	2	220	0.38	1.84	5/8"	1/2"	2	1000	600	375	17.3	***
031.12-B-8700	M64282651	8700	17.5	3312	2.9	2	220	0.38	2.67	5/8"	3/8"	2	1000	580	375	23	***
031.12-B-8940	M64282731	8940	17.5	3312	2.9	2	220	0.38	2.67	5/8"	5/8"	2	1000	600	375	23	
031.12-C-10700	M64282741	10700	22.9	2952	2.6	2	220	0.38	3.56	5/8"	5/8"	2	1000	600	375	27	
DIA 350 FANS																	
035.1-11-C-N	M64260211	6400.0	13	1836	2.8	1	220	0.58	2.17	5/8"	1/2"	2.4	550	155*	410*	14.1	

* Coil Only

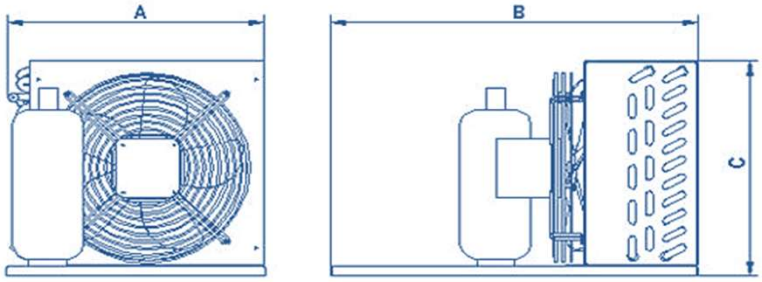

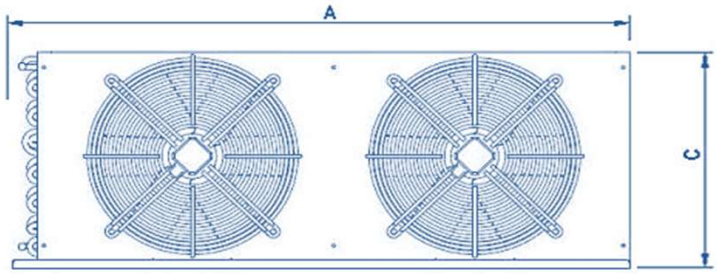

FAN Rating D250 Fan 220V		
Frequency	Hz	50
Speed	RPM	1300
Power Draw	Watts	16
Current Draw	Amps	0.42

FAN Rating D315 Fan 220V		
Frequency	Hz	50
Speed	RPM	1340
Power Draw	Watts	86
Current Draw	Amps	0.38

FAN Rating D350 Fan 220V		
Frequency	Hz	50
Speed	RPM	1400
Power Draw	Watts	130
Current Draw	Amps	0.58

Fin Spacing: 2.2mm ** 3.0mm *** 2.4mm

Capacities based on 80°C Hot Gas, 45°C Condensing, 30°C Ambient Temps.

AMBIENT TEMPERATURES AND ALTITUDES

Southern Africa

Town	Ambient Temp °C	Height m
Alexander Bay	32	0
Aliwal North	35	1337
Barberton	35	852
Bathurst	34	259
Beaufort West	35	863
Berlin	30	1341
Bethlehem	32	1615
Bloemfontein	34	1371
Bremersdorp	32	626
Cape Town	32	0
Carltonville	32	1341
Carolina	33	1690
Ceres	36	457
Clanwilliam	43	76
Craddock	35	873
De Aar	35	1243
Dundee	32	1250
Durban	32	0
East London	32	0
Ermelo	32	1675
Estcourt	34	1181
Eshowe	33	502
Fauresmith	35	932
Fort Beaufort	39	457
Francistown	37	1004
Fraserburg	35	1280
Gaberone	38	1007
George	31	0
Germiston	31	1665
Graaff-Reinet	40	750
Grahamstown	36	539
Grootfontein	35	1263
Hanover	34	1337
Harrismith	31	1628
Hope Town	35	1219
Howick	35	1052
Johannesburg	32	1752
Keetmanshoop	39	1004
Kimberley	35	1196
King Williamstown	37	375
Klerksdorp	34	1324
Knysna	31	0

AMBIENT TEMPERATURES AND ALTITUDES

Southern Africa

Town	Ambient Temp °C	Height m
Kroonstad	32	1348
Krugersdorp	31	1699
Ladysmith	32	1000
Lindley	33	1540
Louis Trichardt	35	961
Lydenburg	33	1470
Mafikeng	35	1272
Maseru	33	1571
Mbabane	32	1163
Middleburg	31	1447
Montagu	34	223
Messina	35	548
Midrand	33	1510
Nelspruit	34	731
Newcastle	32	1185
Oudtshoorn	37	334
Phalaborwa	36	405
Pietermaritzburg	32	762
Pietersburg	34	1301
Piet Retief	33	1271
Port Elizabeth	32	0
Port Shepstone	30	0
Potschefstroom	33	1352
Potgietersrus	34	1176
Pretoria	34	1371
Queenstown	37	1077
Robertson	35	172
Roodeplaat	35	1066
Rustenburg	35	1234
Thabazimbi	37	1028
Uitenhage	37	110
Umtata	34	701
Upington	38	804
Ventersdorp	32	1484
Vereeniging	33	1417
Victoria West	35	1269
Vryburg	36	1186
Warmbad	35	115
Welkom	34	1375
Wepener	32	1439
Windhoek	34	1728
Worcester	37	201

Notes

Notes

Thermocoil [Pty] Ltd

Available At

KOVCO (PTY) LTD

Cape Town	021 511 0866
Durban	031 569 6382
East London	043 722 1760
Johannesburg - Randburg	011 791 6090
Johannesburg - Selby	011 493 8734
Nelspruit	013 752 4656
Pietermaritzburg	033 342 4244
Port Elizabeth	041 453 4407
Pretoria	012 327 5585
Richards Bay	035 032 0071
Windhoek	00264 833718800